

# Trimble Juno 3 Series

## Key Features

Rugged IP54 rating for tough outdoor conditions

Feature packed, fully integrated, affordable

High-sensitivity GPS receiver

5 megapixel autofocus camera

Long life battery for all-day use

Lightweight and compact

## ASSET MANAGEMENT FOR LARGER TEAMS

Harness the strength of your distributed team to provide geo-enabled data you can trust. With the Trimble® Juno® 3 series, your mobile workforce is empowered with a fully integrated, GPS-based data collection system for everyday field work. If your organization is managing critical assets, responding to emergencies or keeping an enterprise GIS current, you can increase efficiency—both in the field and in the office with dedicated asset management workflows and the Trimble Juno 3 series handheld.

Delivered in a compact package resistant to dust, water, and shock, the Trimble Juno provides a complete, integrated package of positioning and imaging for total flexibility day after day.

For standard positioning applications such as navigation, the high-sensitivity receiver delivers optimal yield so you can get a position fast in the harshest conditions. 2 to 5 meter positional accuracy is always available in real time in regions with SBAS coverage. In addition, accuracy can be further improved to 1 to 3 meters through simple postprocessing routines to meet company or regulatory standards.



## Designed for GIS workflows and distributed teams


In GIS environments, data integrity and standardization is critical to maintain total workflow efficiency. Professional, geo-enabled data collection requires dedicated field software. The Trimble Juno 3 series is optimized for Trimble and other industry standard field software, so you can be confident that the data you receive back in the office is exactly what you need for streamlined integration into your enterprise GIS and fast updates.



## All in one mobile solution

Combining the benefits of a GPS device, camera, and PDA, this pocket-sized device provides work teams with a range of tools in a single compact package, so there are fewer batteries to charge and fewer devices to manage.

With a camera at the ready, your teams can document exactly what they see in the field. The Trimble Juno combines photos with GPS so photos can be instantly geotagged for future reference.

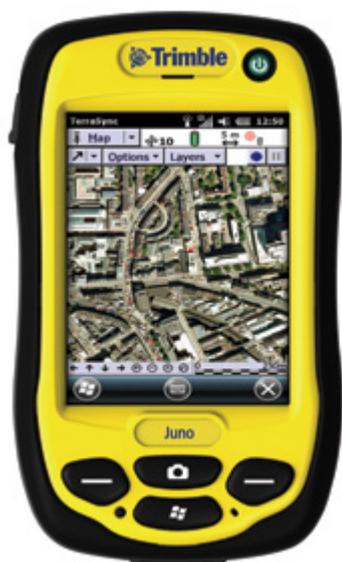

## STANDARD FEATURES

### System

- 5 megapixel digital camera with geotagging
- Bluetooth® v2.0 wireless technology
- 802.11b/g + WAPI wireless LAN
- 3.5 inch QVGA sunlight-readable color touch screen
- Long-life, rechargeable, and removable Li-Ion battery
- 800 MHz processor
- 256 MB RAM
- 2 GB flash memory
- 1 microSD (microSDHC compatible) memory card slot
- Integrated speaker and microphone
- Windows® Embedded Handheld 6.5 Professional in Chinese (Simplified), English, French, German, Italian, Japanese, Korean, Portuguese (Brazilian), Russian, or Spanish

### GPS

- High-sensitivity GPS/SBAS<sup>1</sup> receiver and antenna

### Standard Software

- Adobe Reader
- Microsoft® Office Mobile®, includes Excel Mobile, Word Mobile, Internet Explorer Mobile, Outlook Mobile, and PowerPoint Mobile

### Standard Accessories

- USB data cable
- Wrist lanyard
- International AC power supply
- Stylus with lanyard
- Rechargeable Li-ion battery

### Optional Accessories

- Vehicle power adapter
- External battery charger
- Clear screen protectors (2-pack)
- Vehicle-mount
- Range pole bracket
- Replacement Stylus (2-pack)
- External GPS patch antenna
- Carry case with belt clip
- Anti-glare screen protectors (2-pack)
- Replacement Li-Ion battery
- Replacement AC Power supply

## SOFTWARE COMPATIBILITY

Please refer to the **Product Compatibility** matrix. ([www.trimble.com/mappingGIS/productcompatibility](http://www.trimble.com/mappingGIS/productcompatibility))

## TECHNICAL SPECIFICATIONS

### Physical

Size	138 mm x 79 mm x 31 mm (5.43 in x 3.11 in x 1.22 in)
Weight	0.31 kg (0.69 lb) with battery
Processor	800 MHz Samsung processor
Memory	256 MB RAM and 2 GB built-in storage
Battery	3060 mAh lithium-ion, rechargeable in unit
Power <sup>2</sup>	
Low (no GPS, backlight on <sup>3</sup> )	14 hours
Normal (with GPS and backlight on)	10 hours

### Environmental (MIL-STD-810G)

Temperature	
Operating	-20 °C to +60 °C (-4 °F to 140 °F)
Storage	-40 °C to +70 °C (-40 °F to 158 °F)
Humidity limit	95% RH, non-condensing
Drop	1.2 m (4 ft) drop plywood over concrete
	2 drops per 6 sides at ambient temperature 23 °C (73 °F)
Tumble	100 cycles (200 drops) x 50 cm (1.64 ft), 10 cycles/minute
Casing	IP54

### Input/output

Expansion	microSD Card slot (microSDHC compatible)
Display	8.9 cm (3.5 in) QVGA (240 x 320 pixel) resistive, sunlight readable, LED backlight
Audio	Built-in microphone and speaker, record and playback utilities
I/O	USB client v2.0 compliant
Radios	Bluetooth v2.0 <sup>4</sup> Wi-Fi 802.11b/g
Digital camera	5 megapixel color camera with autofocus JPEG photo format, WMV video format

### GPS

Channels	12 (L1 code only)
Integrated real-time	SBAS <sup>1</sup>
Update rate	1 Hz
Time to first fix	30 seconds (typical)
Protocols	.SIRF, NMEA-0183

### Accuracy (HRMS)<sup>5</sup> after differential correction

Code postprocessed <sup>6</sup>	1-3 m
Real-time (SBAS <sup>1</sup> )	2-5 m

1 SBAS (Satellite Based Augmentation System). Includes WAAS (Wide Area Augmentation System) available in North America only, EGNOS (European Geostationary Navigation Overlay System) available in Europe only, and MSAS available in Japan only.  
 2 Using wireless technology, such as Bluetooth or wireless LAN will consume additional battery power.  
 3 Backlight setting at 70% brightness.  
 4 Bluetooth and wireless LAN type approvals are country specific. Trimble Juno series handhelds have Bluetooth and wireless LAN approval in the USA and EU. For other countries please consult your local Reseller.  
 5 Horizontal Root Mean Squared accuracy. Requires data to be collected using vertical mounting, minimum of 4 satellites, PDOP mask at 99, SNR mask at 12 dBHz, elevation mask at 5 degrees, and reasonable multipath conditions. Ionospheric conditions, multipath signals or obstruction of the sky by buildings or heavy tree canopy may degrade precision by interfering with signal reception. Accuracy varies with proximity to base station by +1 ppm for postprocessing.  
 6 Requires Trimble DeltaPhase™ technology, as supported in Trimble GPS Pathfinder® Office software version 4.2.0 and later, or Trimble Positions™ Desktop add-in 10.1.0, or Trimble GPS Analyst™ Extension for Esri ArcGIS for Desktop software, version 2.20 and later.

© 2012-2016, Trimble Navigation Limited. All rights reserved. Trimble, the Globe & Triangle logo, GPS Pathfinder, and Juno are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. DeltaPhase, GPS Analyst, and Positions are trademarks of Trimble Navigation Limited. Microsoft, Mobile, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Trimble Navigation Limited is under license. All other trademarks are the property of their respective owners. PN 022501-2791 (04/16)

Specifications subject to change without notice.



TRIMBLE AUTHORIZED DISTRIBUTION PARTNER

### NORTH AMERICA

Trimble Navigation Limited  
 10368 Westmoor Dr  
 Westminster CO 80021  
 USA

### EUROPE

Trimble Germany GmbH  
 Am Prime Parc 11  
 65479 Raunheim  
 GERMANY

### ASIA-PACIFIC

Trimble Navigation  
 Singapore Pty Limited  
 80 Marine Parade Road  
 #22-06, Parkway Parade  
 Singapore 449269  
 SINGAPORE

